

ACOUSTIC & ELECTRICAL SPECIFICATIONS

- Nominal Impedance 8 ohms
- Max Amp Power 175 watts
- Frequency Response 38Hz – 20kHz
- Sensitivity 90 dB SPL, 1 watt @ 1 meter
- Crossover Frequency 2800Hz

SYSTEM COMPONENTS:

- Cabinet (Black) (Not for sale)
- Cabinet (Cherry) (Not for sale)
- Grille (Upper) 333203-001
- Grille (Lower) 330976-001
- Low Frequency Transducer 6 1/2" (160mm) Co-injected woofer, shielded 333235-001
- DC Resistance 5.6 ohms $\pm 10\%$
- High Frequency Transducer 1" (25mm) Neodymium Soft Dome 333232-001

SYSTEM COMPONENTS: (cont.)

- DC Resistance 3.6 ohms $\pm 10\%$
- Crossover Network 333379-001

AURAL SWEEP TEST SPECIFICATIONS:

- System Aural Sweep Test 6.0V Input 20 Hz to 20 kHz
- L.F. Aural Sweep Test 6.0V Input 20 Hz to 3 kHz
- H.F. Aural Sweep Test 2.0V Input 2 kHz to 20 kHz

PHYSICAL SPECIFICATIONS

- Enclosure dimensions: 35 1/2" x 7 1/2" x 14 3/8" (H x W x D)
(902x190x365mm)


SHIPPING WEIGHT:

- 33.9 lbs. (15.2 kg) Each


WARRANTY:

- Refer to Warranty Statement packed with each product.


PACKAGING

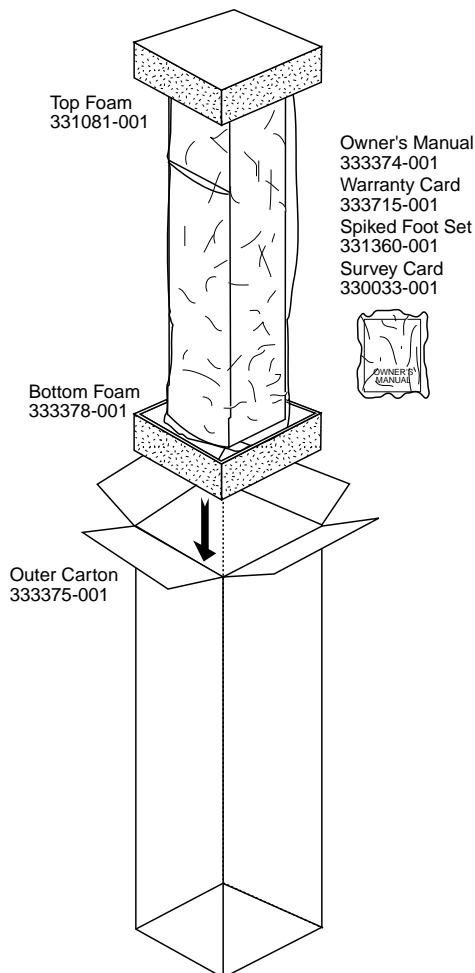

WIRING DIAGRAM

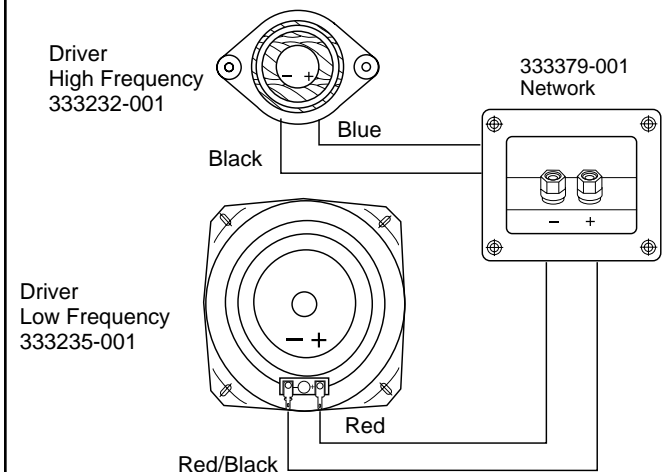


RS-4 SCHEMATIC

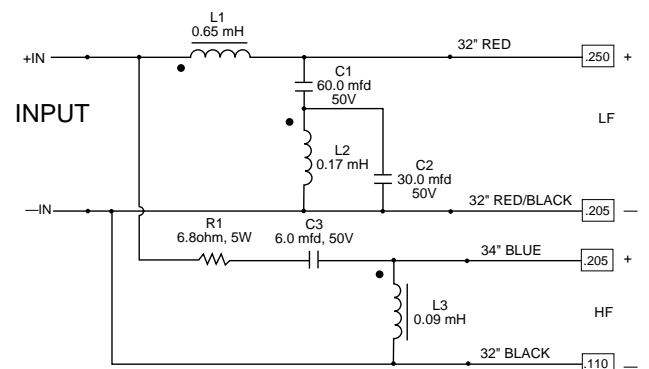

RS-4

COMPONENT EXPLODED VIEW

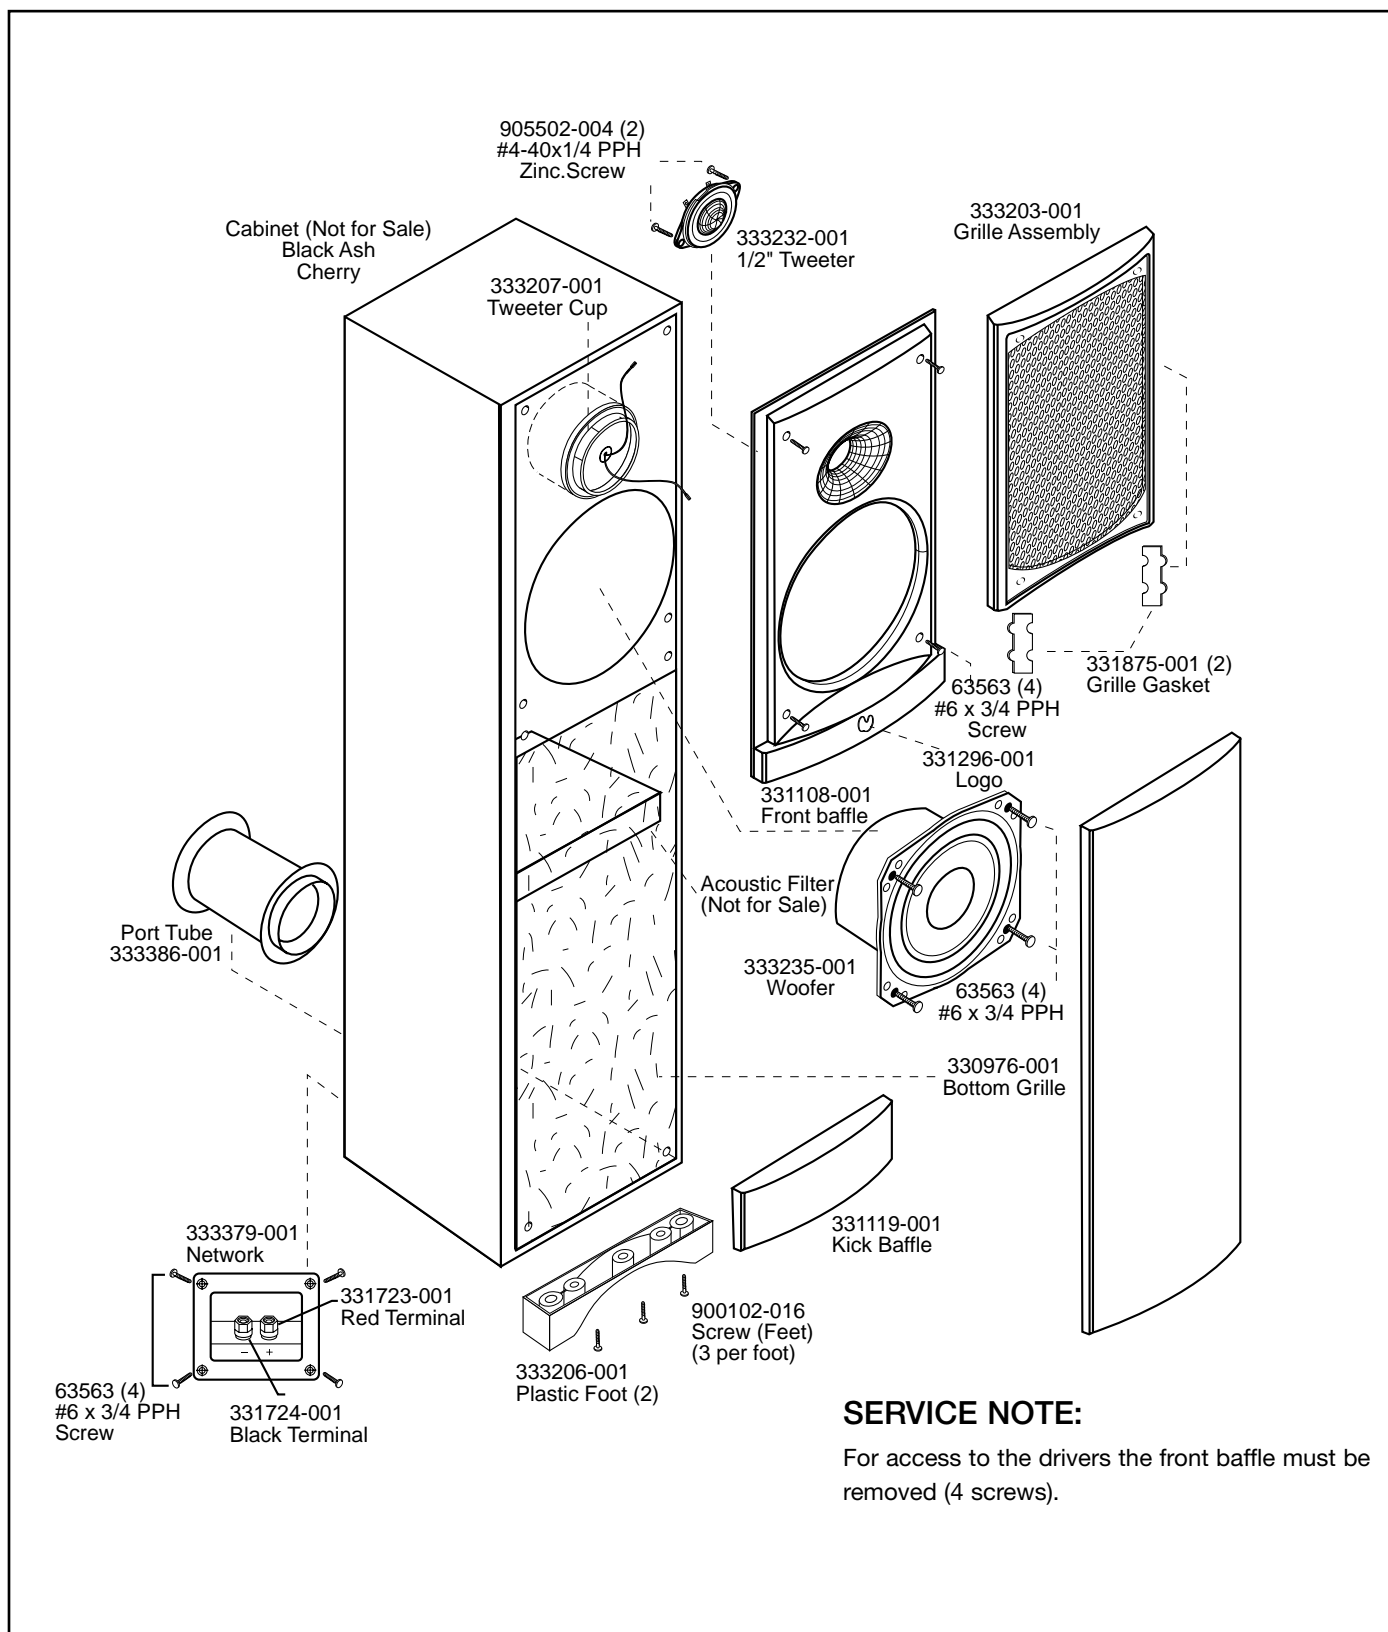

RS-4